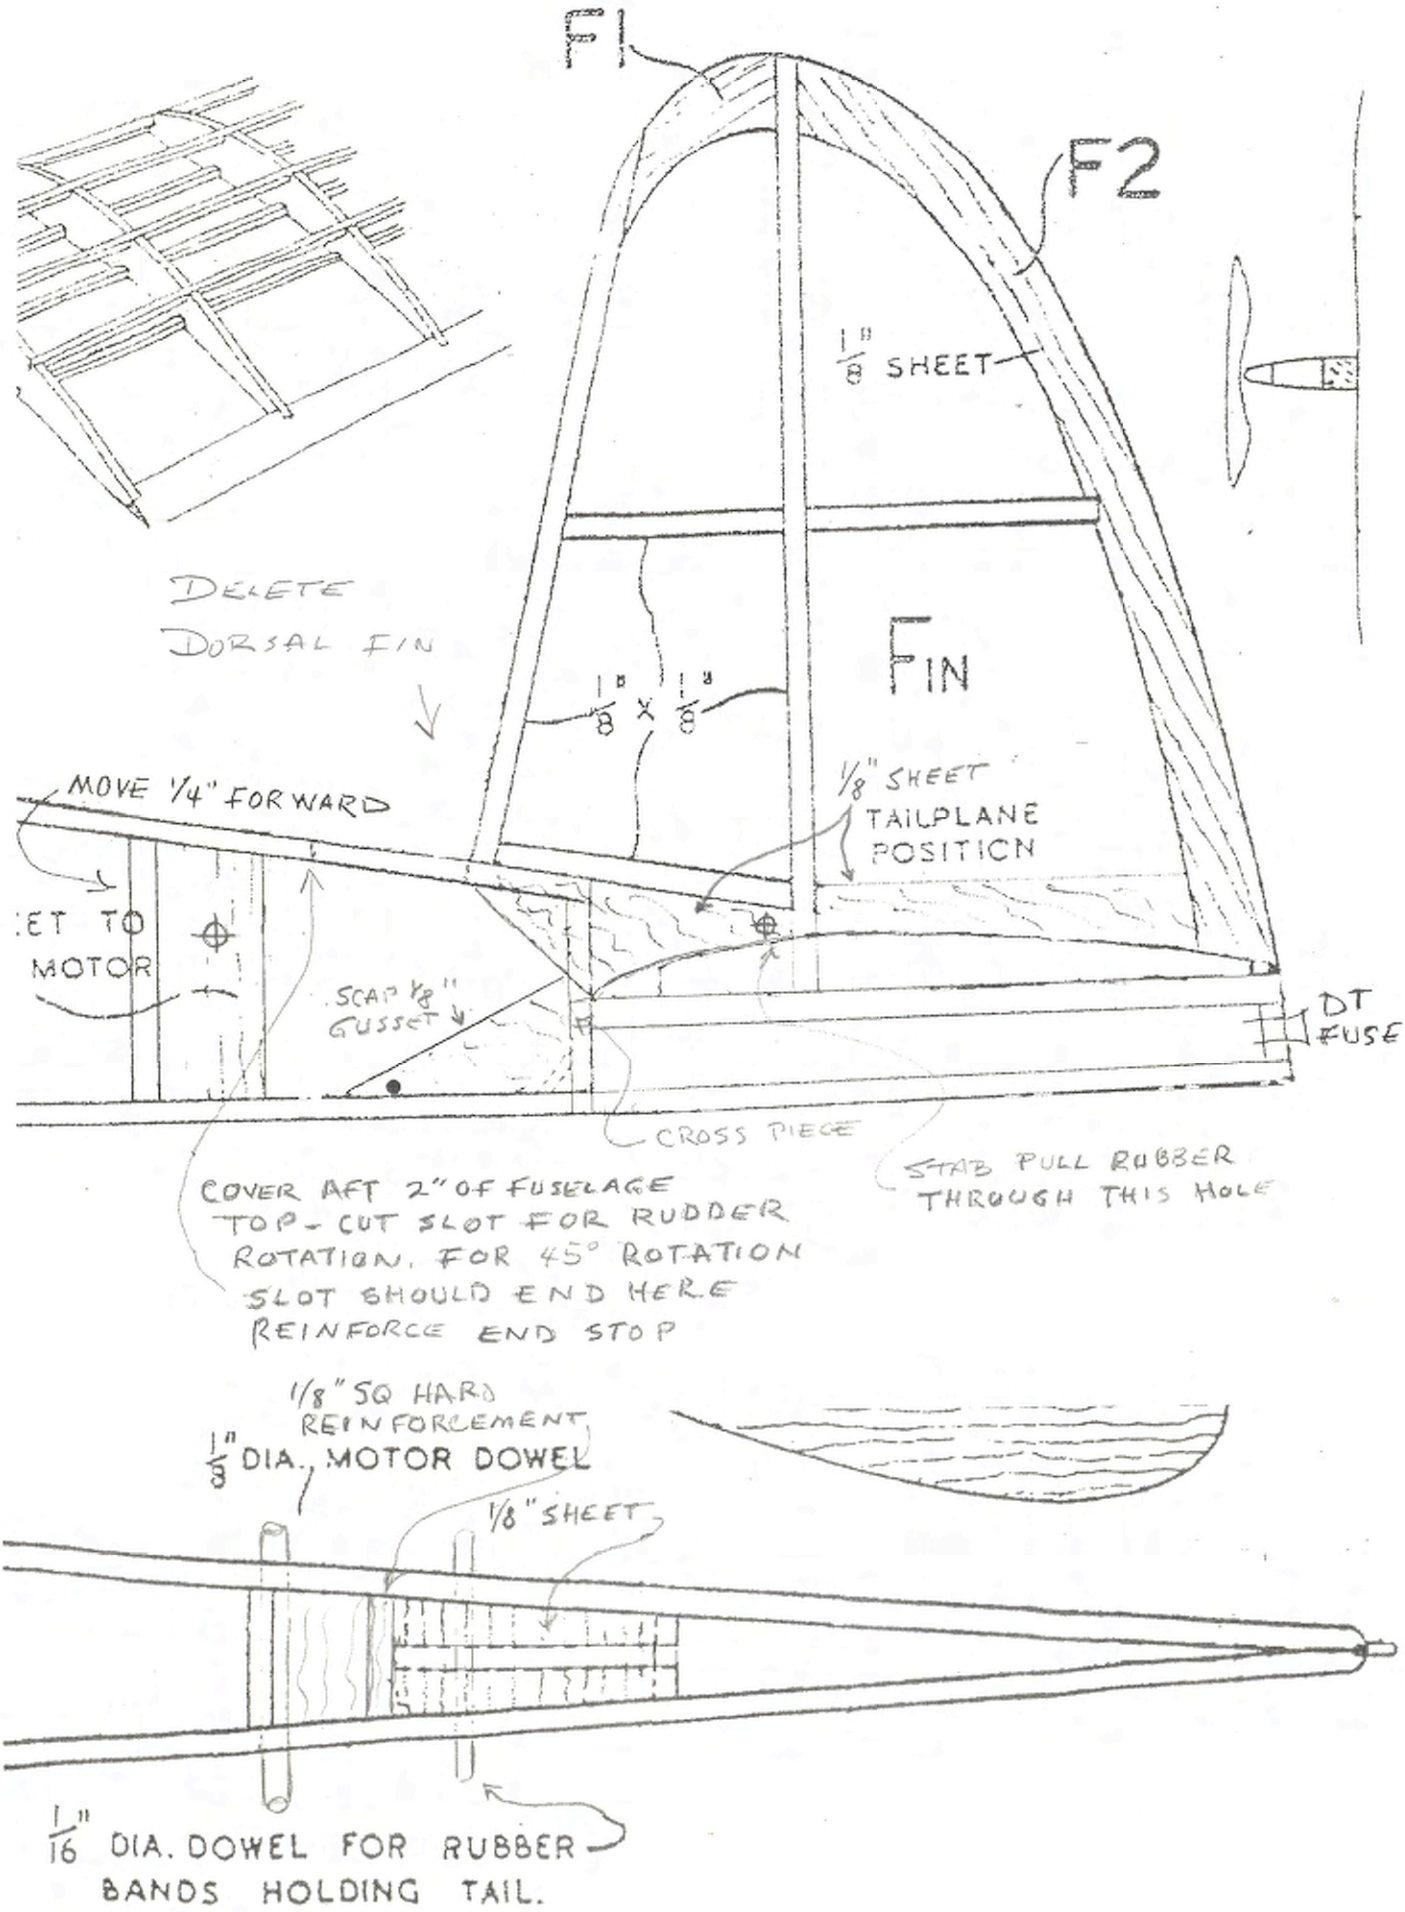
F1
F2
1/8 SHEET
DELETE
DORSAL FIN
FIN
1/8 X 1/8
MOVE 1/4" FORWARD
1/8" SHEET
TAILPLANE
POSITION
ET TO
MOTOR
SCRAP 1/8"
GUSSET
DT
FUSE
CROSS PIECE
STAB PULL RUBBER
THROUGH THIS HOLE
COVER AFT 2" OF FUSELAGE
TOP - CUT SLOT FOR RUDDER
ROTATION. FOR 45° ROTATION
SLOT SHOULD END HERE
REINFORCE END STOP
1/8" SQ HARD
REINFORCEMENT
1/8 DIA., MOTOR DOWEL
1/8" SHEET
1/16 DIA. DOWEL FOR RUBBER
BANDS HOLDING TAIL.